

**Assignment (1)**

**Due Monday 15 March**

**Question (1)**

Classify the following signals as energy signals or power signals. Find the normalized energy or normalized power of each.

- (a)  $x(t) = A \cos 2\pi f_0 t$  for  $-\infty < t < \infty$
- (b)  $x(t) = \begin{cases} A \cos 2\pi f_0 t & \text{for } -T_0/2 \leq t \leq T_0/2, \text{ where } T_0 = 1/f_0 \\ 0 & \text{elsewhere} \end{cases}$
- (c)  $x(t) = \begin{cases} A \exp(-at) & \text{for } t > 0, a > 0 \\ 0 & \text{elsewhere} \end{cases}$
- (d)  $x(t) = \cos t + 5 \cos 2t$  for  $-\infty < t < \infty$

**Question (2)**

Determine which, if any, of the following functions have the properties of autocorrelation functions. Justify your determination. [Note:  $\mathcal{F}\{R(\tau)\}$  must be a nonnegative function. Why?]

- (a)  $x(\tau) = \begin{cases} 1 & \text{for } -1 \leq \tau \leq 1 \\ 0 & \text{otherwise} \end{cases}$
- (b)  $x(\tau) = \delta(\tau) + \sin 2\pi f_0 \tau$
- (c)  $x(\tau) = \exp(|\tau|)$
- (d)  $x(\tau) = 1 - |\tau|$  for  $-1 \leq \tau \leq 1$ , 0 elsewhere
- 

**Question (3)**

Using time averaging, find the average normalized power in the waveform  $x(t) = 10 \cos 10t + 20 \cos 20t$ .

Repeat Problem 1.4 using the summation of spectral coefficients.

#### Question (4)

Determine which, if any, of the following functions have the properties of power spectral density functions. Justify your determination.

- (a)  $X(f) = \delta(f) + \cos^2 2\pi f$
- (b)  $X(f) = 10 + \delta(f - 10)$
- (c)  $X(f) = \exp(-2\pi|f - 10|)$
- (d)  $X(f) = \exp[-2\pi(f^2 - 10)]$


#### Question (5)

Use the sampling property of the unit impulse function to evaluate the following integrals.

- (a)  $\int_{-\infty}^{\infty} \cos 6t \delta(t - 3) dt$
- (b)  $\int_{-\infty}^{\infty} 10\delta(t)(1 + t)^{-1} dt$
- (c)  $\int_{-\infty}^{\infty} \delta(t + 4)(t^2 + 6t + 1) dt$
- (d)  $\int_{-\infty}^{\infty} \exp(-t^2)\delta(t - 2) dt$

#### Question (6)

Find  $X_1(f) * X_2(f)$  for the spectra shown in Figure P1.1.

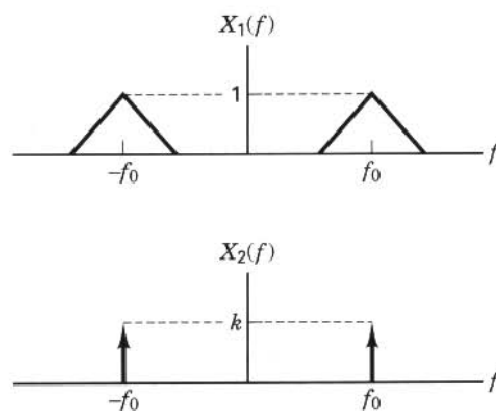

### Question (7)

The two-sided power spectral density,  $G_x(f) = 10^{-6} f^2$ , of a waveform  $x(t)$  is shown in Figure P1.2.

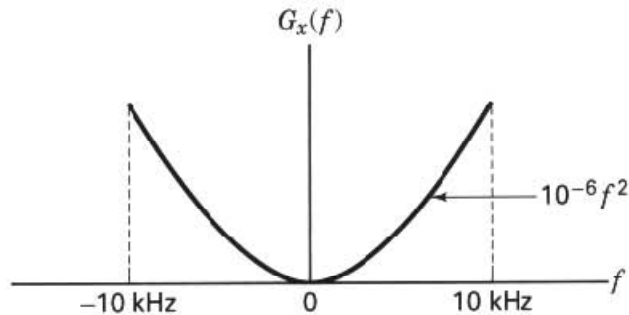


Figure P1.2

- Find the normalized average power in  $x(t)$  over the frequency band from 0 to 10 kHz.
- Find the normalized average power contained in the frequency band from 5 to 6 kHz.

### Question (8)

$$G_x(f) = 10^{-4} \left\{ \frac{\sin [\pi(f - 10^6)10^{-4}]}{\pi(f - 10^6)10^{-4}} \right\}^2$$


find the value of the signal bandwidth using the following bandwidth definitions:

- Half-power bandwidth.
- Noise equivalent bandwidth.
- Null-to-null bandwidth.
- 99% of power bandwidth. (Hint: Use numerical methods.)
- Bandwidth beyond which the attenuation is 35 dB.
- Absolute bandwidth.

### Question (9)

- (1) A signal  $s(t)$  having power spectral density  $\Phi_s(f) = 5\Pi\left(\frac{f}{10,000}\right)$  is passed through a channel in which additive white Gaussian noise  $n(t)$  and interference  $i(t)$  are present, resulting in a received signal of  $r(t) = s(t) + n(t) + i(t)$ . You may assume that the signal, noise and interference are all independent and that the noise has power spectral density  $\Phi_n(f) = 0.1$ , and the interference has power spectral density  $\Phi_i(f) = 100\Lambda\left(\frac{f-2000}{100}\right) + 100\Lambda\left(\frac{f+2000}{100}\right)$ .

The received signal is then filtered twice, first to bandlimit the signal and then to excise the interference, according to the following block diagram:

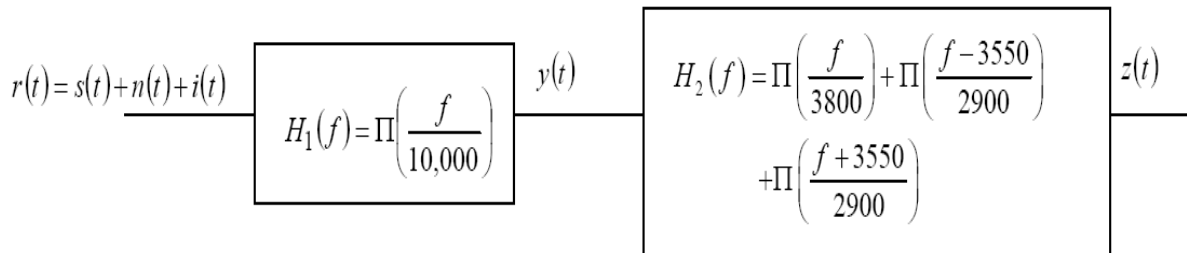

- Find the Signal to Interference and Noise Ratio (SINR) of  $r(t)$
- Find the SINR of  $y(t)$ .
- Find the SINR of  $z(t)$ .